



DATA SHEET

PRODUCT **NTC Thermistor**

SERIES **JCR 03 Series**

PART NO.

**QUICK
REFERENCE
DATA**

PARAMETER	VALUE	UNIT
Size	03	mm
Resistance Value R25	10~ 330	KΩ
B25/50	3380~4250	K
B25/85	3435~4250	K

ISSUE DATE **2025/04/18**

REVISION DATE **2025/04/18**

REFERENCE NO.

RoHS COMPLIANCE ITEM

Halogen Free

Disclaimer:

- This datasheet is downloaded from the Website of Joyin Co., Ltd, and Joyin Co., Ltd. reserves all rights for modification content without further notification.
- All product, specification and data are subject to change without notice.
- Joyin Co., Ltd, its affiliates, agents, employees, and all persons acting on its or their behalf, hereby disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics.
- Joyin Co., Ltd makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. It is the customer's responsibility to validate that a particular product is suitable for use in a particular application.
- To the maximum extent permitted by applicable law, Joyin Co., Ltd disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- If you have any questions, please contact our sales staff.

NTC Sensor STD. JCR03 series



Features

RoHS / Halogen-Free (HF) compliant
Body size : $\varnothing 3\text{mm}$
Operating temperature range : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Wide resistance range
Agency recognition: UL / TUV

符合 RoHS / Halogen-Free (HF) 規範
尺寸 : $\varnothing 3\text{mm}$
工作溫度範圍 : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
電阻範圍廣
安規認證: UL / TUV

Applications

Home appliances
Office automation
Switch mode power supplies
Adapters
Security


家電
OA 設備
開關模式電源
適配器
安防設備

How to Order

Part Number Code																			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
J	C	R	1	0	3	F	3	4	4	F	B	5	2	P	U	5	0	3	B
①			②			③	④			⑤	⑥	⑦	⑧	⑨	⑩		A		B

①	Product Type	JCR03 series	⑤	Tolerance of B Value	F = $\pm 1\%$ G = $\pm 2\%$ H = $\pm 3\%$ J = $\pm 5\%$	⑨	Lead Style	E = Outside Kink Lead G = Winder Kink Lead
②	Zero Power Resistance @25°C (R25)	502 = 5K Ω 103 = 10K Ω 474 = 470K Ω	⑥	Definition of B Value	A = 25/50 B = 25/85	⑩	Packaging	U5 = L:25mm for Bulk AW = H0:16mm for Ammo
③	Tolerance of R25	F = $\pm 1\%$ G = $\pm 2\%$ H = $\pm 3\%$ J = $\pm 5\%$ K = $\pm 10\%$	⑦	Lead Diameter	5 = 0.5 mm	A	Body Size	03 = 3 mm
④	B Value	344 = 3435 K 405 = 4050 K	⑧	Lead Spacing	2 = 2.5 mm 4 = 3.5 mm	B	Optional Suffix	Internal Control Code

Structure and Dimension



Unit in mm

Body Size	Dmax.	Tmax.	F ± 0.5	d ± 0.05	Wmax	H1max
$\varnothing 3\text{mm}$	4.0	3.5	2.5	0.5	3.0	10.0

Electrical Characteristics

Part No	Zero Power Resistance at 25°C	Tolerance of R25	B25/50 Value	Tolerance of B Value	Dissipation Factor	Thermal Time Constant	Max. Power Rating at 25°C	Safety Approvals
	R 25 (Ω)	(± %)	(K)	(± %)	δ(mW/°C)	τ (sec.)	(mW)	 
JCR103X338YA	10,000	10,5,3,2,1	3380	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR103X410YA	10,000	10,5,3,2,1	4100	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR473X395YA	47,000	10,5,3,2,1	3950	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR503X395YA	50,000	10,5,3,2,1	3950	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR104X395YA	100,000	10,5,3,2,1	3950	5,3,2,1	Approx. 2.5	Approx. 18	150	
JCR104X425YA	100,000	10,5,3,2,1	4250	5,3,2,1	Approx. 2.5	Approx. 18	150	

Part No	Zero Power Resistance at 25°C	Tolerance of R25	B25/85 Value	Tolerance of B Value	Dissipation Factor	Thermal Time Constant	Max. Power Rating at 25°C	Safety Approvals
	R 25 (Ω)	(± %)	(K)	(± %)	δ(mW/°C)	τ (sec.)	(mW)	 
JCR102X360YB	1,000	10,5,3,2,1	3600	5,3,2,1	Approx. 2.5	Approx. 18	150	
JCR472X390YB	4,700	10,5,3,2,1	3900	5,3,2,1	Approx. 2.5	Approx. 18	150	
JCR502X345YB	5,000	10,5,3,2,1	3450	5,3,2,1	Approx. 2.5	Approx. 18	150	
JCR682X390YB	6,800	10,5,3,2,1	3900	5,3,2,1	Approx. 2.5	Approx. 18	150	
JCR103X344YB	10,000	10,5,3,2,1	3435	5,3,2,1	Approx. 2.5	Approx. 18	150	■ ■
JCR103X398YB	10,000	10,5,3,2,1	3980	5,3,2,1	Approx. 2.5	Approx. 18	150	■ ■
JCR333X398YB	33,000	10,5,3,2,1	3980	5,3,2,1	Approx. 2.5	Approx. 18	150	
JCR473X409YB	47,000	10,5,3,2,1	4090	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR503X409YB	50,000	10,5,3,2,1	4090	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR104X395YB	100,000	10,5,3,2,1	3950	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR104X408YB	100,000	10,5,3,2,1	4080	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR104X419YB	100,000	10,5,3,2,1	4190	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR104X425YB	100,000	10,5,3,2,1	4250	5,3,2,1	Approx. 2.5	Approx. 18	150	
JCR104X436YB	100,000	10,5,3,2,1	4360	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR204X406YB	200,000	10,5,3,2,1	4055	5,3,2,1	Approx. 2.5	Approx. 18	150	■
JCR334X398YB	330,000	10,5,3,2,1	3980	5,3,2,1	Approx. 2.5	Approx. 18	150	


※ X : R Tolerance, Y : B Value Tolerance

Reliability-NTC Thermistor JCR

Item	Standard	Test condition	Specifications															
Terminal pull strength	IEC 60068-2-21	Gradually applying the force specified and keeping the unit fixed for 10±1 sec. <table><tr><th>Terminal diameter (mm)</th><th>Force (Kg)</th></tr><tr><td>d ≤ 0.25mm</td><td>1N (0.102Kg)</td></tr><tr><td>0.25mm < d ≤ 0.35mm</td><td>2.5N (0.255Kg)</td></tr><tr><td>0.35mm < d ≤ 0.50mm</td><td>5N (0.510Kg)</td></tr><tr><td>0.50mm < d ≤ 0.80mm</td><td>10N (1.02Kg)</td></tr></table>	Terminal diameter (mm)	Force (Kg)	d ≤ 0.25mm	1N (0.102Kg)	0.25mm < d ≤ 0.35mm	2.5N (0.255Kg)	0.35mm < d ≤ 0.50mm	5N (0.510Kg)	0.50mm < d ≤ 0.80mm	10N (1.02Kg)	No visible damage					
Terminal diameter (mm)	Force (Kg)																	
d ≤ 0.25mm	1N (0.102Kg)																	
0.25mm < d ≤ 0.35mm	2.5N (0.255Kg)																	
0.35mm < d ≤ 0.50mm	5N (0.510Kg)																	
0.50mm < d ≤ 0.80mm	10N (1.02Kg)																	
Bending Strength of Terminals	IEC 60068-2-21	Hold specimen and apply the force specified below to each lead. Bend the specimen to 90° , then return to the original position. Repeat the procedure in the opposite direction. <table><tr><th>Terminal diameter (mm)</th><th>Force (Kg)</th></tr><tr><td>d ≤ 0.25mm</td><td>0.5N (0.051Kg)</td></tr><tr><td>0.25mm < d ≤ 0.35mm</td><td>1.25N (0.128Kg)</td></tr><tr><td>0.35mm < d ≤ 0.50mm</td><td>2.5N (0.255Kg)</td></tr><tr><td>0.50mm < d ≤ 0.80mm</td><td>5N (0.510Kg)</td></tr></table>	Terminal diameter (mm)	Force (Kg)	d ≤ 0.25mm	0.5N (0.051Kg)	0.25mm < d ≤ 0.35mm	1.25N (0.128Kg)	0.35mm < d ≤ 0.50mm	2.5N (0.255Kg)	0.50mm < d ≤ 0.80mm	5N (0.510Kg)	No visible damage					
Terminal diameter (mm)	Force (Kg)																	
d ≤ 0.25mm	0.5N (0.051Kg)																	
0.25mm < d ≤ 0.35mm	1.25N (0.128Kg)																	
0.35mm < d ≤ 0.50mm	2.5N (0.255Kg)																	
0.50mm < d ≤ 0.80mm	5N (0.510Kg)																	
Solderability	IEC 60068-2-20	245±3℃, 3±0.3 sec	At least 95% of terminal electrode is covered by new solder															
Resistance to soldering heat	IEC 60068-2-20	260±5℃, 10±1 sec	No visible damage △R25/R25 ≤ ±5%															
High temperature storage	IEC 60068-2-2	125±2℃, 1000hrs	No visible damage △R25/R25 ≤ ±5%															
Damp Heat Steady State	IEC 60068-2-78	40±2℃ , 90~95% RH, 1000±24hrs	No visible damage △R25/R25 ≤ ±5%															
Rapid Change of Temperature	IEC 60068-2-14	The conditions shown below shall be repeated 5 cycles. <table><tr><th>Step</th><th>Temperature (℃)</th><th>Period (minutes)</th></tr><tr><td>1</td><td>-40±5</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>5±3</td></tr><tr><td>3</td><td>125±5</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>5±3</td></tr></table>	Step	Temperature (℃)	Period (minutes)	1	-40±5	30±3	2	Room temperature	5±3	3	125±5	30±3	4	Room temperature	5±3	No visible damage △R25/R25 ≤ ±5%
Step	Temperature (℃)	Period (minutes)																
1	-40±5	30±3																
2	Room temperature	5±3																
3	125±5	30±3																
4	Room temperature	5±3																
Life Test	IEC 60539-1 4.26.3	25±5℃ , Pmax, 1000hrs	No visible damage △R25/R25 ≤ ±5%															

Packaging

Tape and Reel Dimensions

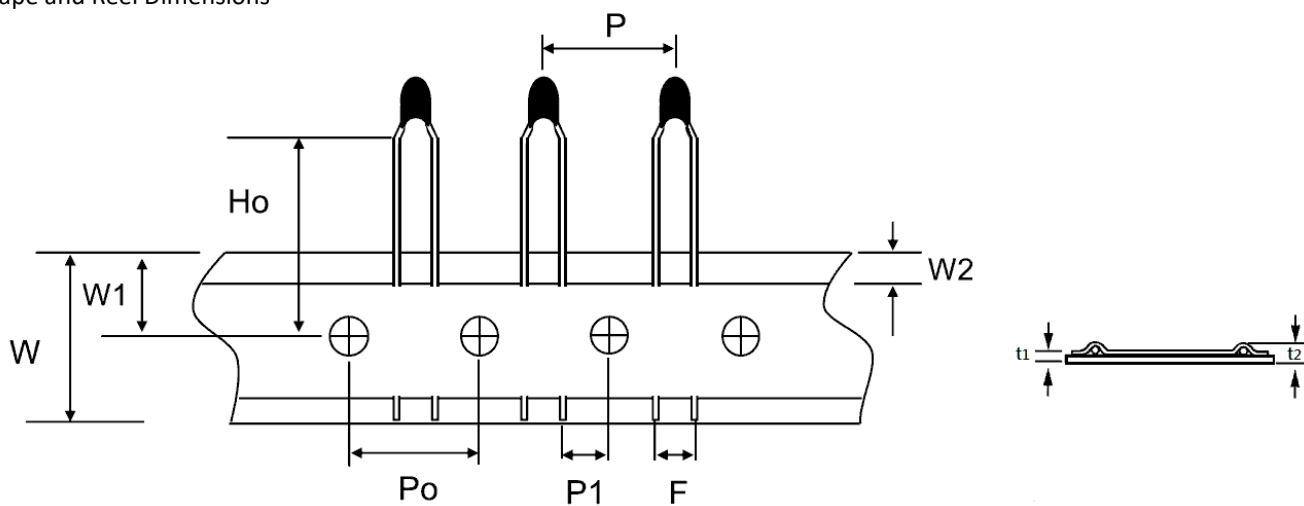

Unit in mm

Symbols	P	P ₀	P ₁	F	H _o	W	W ₀	W ₁	W ₂	t ₁	t ₂
Nor.	12.7	12.7	5.1	2.5	18	18	12	9.0	2.0	0.6	1.2
Tol.	±1.0	±0.3	±1.0	±0.5	±1.0	^{+1.0} _{-0.5}	min	±0.5	max	±0.05	max